


Fiber Tap™ FTTX

Multilink's Fiber Tap™ is designed around adaptability to the ever changing Outside Plant (OSP) infrastructure. Hardened connectors and robust design withstand the harsh OSP world, while allowing flexibility per application.

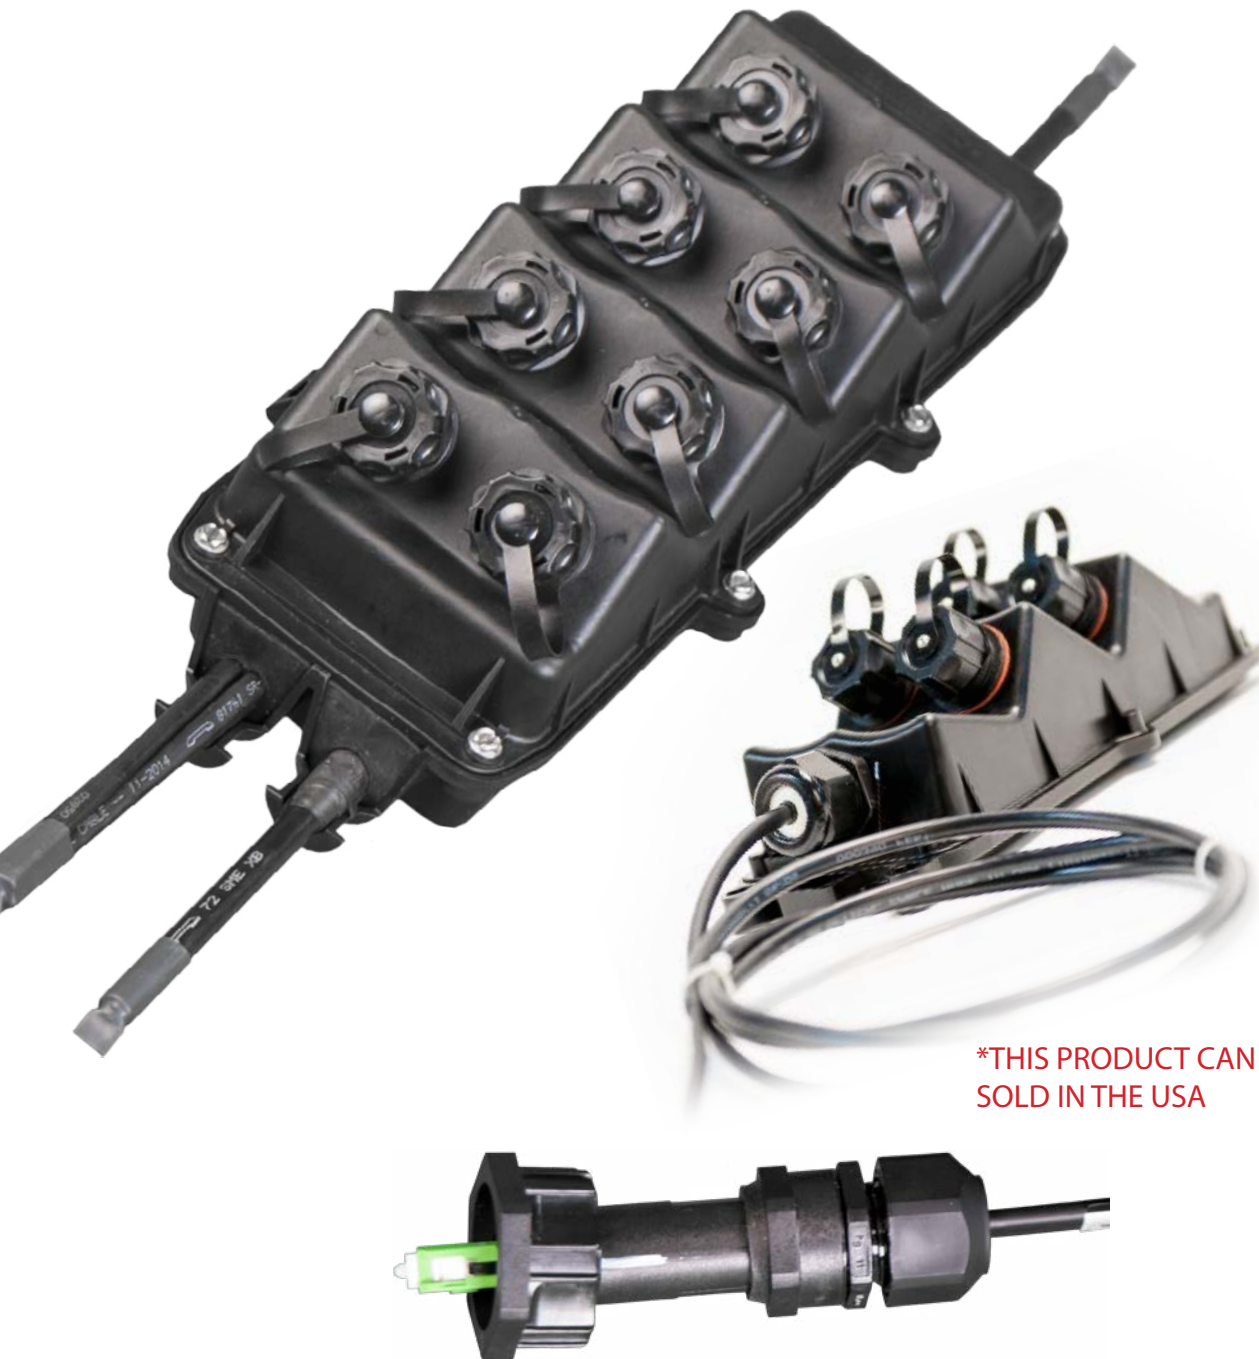

*THIS PRODUCT CAN NOT BE
SOLD IN THE USA

Patents In Process

(440) 366-6966 www.gomultilink.com/ 580 Ternes Ln, Elyria, OH 44035

© Multilink Inc. 2015 All Rights Reserved

Copyright 2017 Multilink Inc. • All rights reserved • Specifications subject to change without notice • Rev. May 5, 2017

Multilink
Innovation At Work



YouTube
youtube.com/gomultilink

General Specifications

Parameter	Specification
Mounting:	Integrated Pole and Wall, Aerial, Pedestal
Burial:	Below grade rating / Vault compatible
Material:	UV Stabilized thermal engineering grade plastic
Enclosure Features:	Re-enterable & Compression Sealed
Standards:	Tested in accordance to Telcordia GR-771-Core

Fiber Tap

FT-4D		
 *THIS PRODUCT CAN NOT BE SOLD IN THE USA	Stock ID:	Customized
	Dimensions:	2.98"H x 4.81"W x 11.41"L
	Weight:	1.2 lbs. (Without incoming fiber)
	Input Ports:	(1) Compression, Ø 0.27"-0.63"
	Output Ports:	(4) SC Simplex or LC Duplex
	Output Capacity:	(4) SC or (8) LC


FT-8D		
 *THIS PRODUCT CAN NOT BE SOLD IN THE USA	Stock ID:	Customized
	Dimensions:	4.37"H x 5.88"W x 16.61"L
	Weight:	3.1 lbs. (Without incoming fiber)
	Input Ports:	(1) Compression, Ø 0.27"-0.63"
	Output Ports:	(8) SC Simplex or LC Duplex
	Output Capacity:	(8) SC or (16) LC

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Fiber Tap Cont.

FT-8NC

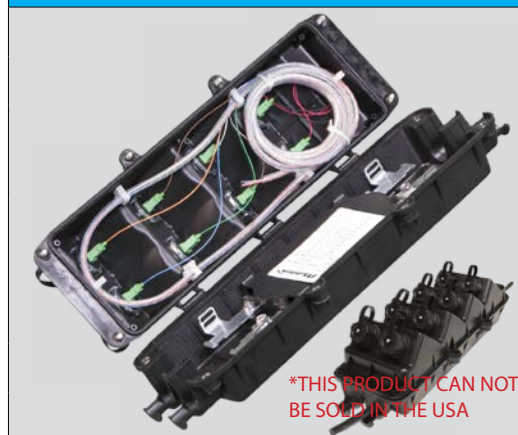

Stock ID:	Customized
Dimensions:	4.37"H x 5.88"W x 16.61"L
Weight:	3.1 lbs. (Without incoming fiber)
Input Ports:	(4) Non-Captive Grommets, 0.50 maximum
Output Ports:	(8) SC Simplex or LC Duplex
Output Capacity:	(8) SC or (16) LC
Splice Tray:	(1) 12 Fiber Single Fusion

Quick Features



O-Ring Sealed & Re-Enterable Design

The o-ring provides and compressed seal. Fastening bolts allow for re-entry and ensure a complete compressed seal.

Multi-Housing Fittings

Capable of housing numerous fittings, making the Fiber Tap™ highly compatible with almost any connector on the market.



Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Quick Features




Angled Output Adapters

The Fiber Taps angled adapters allow for ease of access to ports for an optimized field installation process.

Multi-Service Applications

The Fiber Tap has provisions for Integrated Aerial, Vault, and Pedestal installations. All are available with predetermined fiber lengths.

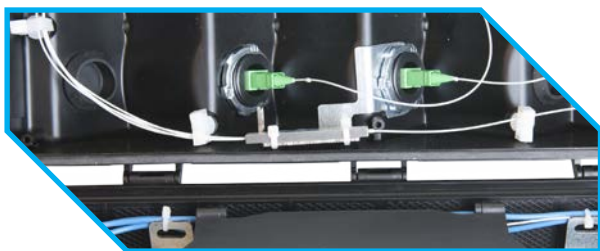

Multiple Splitter Options

Available with pre-installed splitters in the form of 1x4, 1x8, or 1x16

Customized Applications

Available in pre loaded customizeable lengths and spooled for quick application installations.



PED Installation

Optimized to handle PED installations

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Accessories

Tap Bracket Kit

Products	Description	Stock ID
	FT-4D STD Tap Bracket Kit	072-391-11
	FT-8NC Tap Bracket Kit	072-391-21
	FT-8D Tap Bracket Kit	072-391-21
	FT-2NC-S & FT-2NC-P Tap Bracket Kit	072-391-20

Grommets



Products	Description	Stock ID
	GROMMET PLUG FIBER TAP	642-065-10
	CABLE GROMMET PLUG FIBER TAP	642-064-10
	GROMMET 4 FLAT FIBER TAP	642-089-10
	FLAT DROP PIN	10-7726
*Other sizes available on request. Please contact your sales representative.		

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 954 499 9203 Mobile: +1 305 684 2388 Email: hquinones@gomultilink.com

Accessories Cont.

Bulkheads & Brackets

Products	Description	Stock ID
	KIT BRKT 6 SC DPLX APC FT-8NC	072-453-10
	KIT BRKT 6 SC DPLX UPC FT-8NC	072-453-20
	KIT BRKT 6 LC QUAD APC FT-8NC	072-453-30
	KIT BRKT 6 LC QUAD UPC FT-8NC	072-453-40

Splitters & Splice Trays

Products	Description	Stock ID
	AVAILABLE WITH 1x4 OR 1x8 SMALL FORM SPLITTERS	Customized
	SPLICE TRAY KIT	072-394-10

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 954 499 9203 Mobile: +1 305 684 2388 Email: hquinones@gomultilink.com

Accessories Cont.

Connectorization

Products	Description	Stock ID
	Drop Cable	Customized
	IP Single mode SC/APC Connector Kit for Flat Drop	072-424-10
	IP Single mode SC/APC Connector Kit for Round Drop	072-426-10
	IP Single mode SC/UPC Connector Kit for Flat Drop	072-424-20
	IP Single mode SC/UPC Connector Kit for Round Drop	072-426-20
	IP Single mode LC/APC Connector Kit for Flat Drop	072-425-10
	IP Single mode LC/APC Connector Kit for Round Drop	072-427-10
	IP Single mode LC/UPC Connector Kit for Flat Drop	072-425-20
	IP Single mode LC/UPC Connector Kit for Round Drop	072-427-20
	Single mode SC/UPC Connector Blue Housing 9/125	066-024-10
	Single mode SC/APC Connector Green Housing 9/125	066-025-10
	Multi mode SC/UPC Connector Beige Housing 62.5/125 OM1	066-027-10
	Multi mode SC/UPC Connector Beige Housing 50/125 OM2	066-026-10
	Multi mode SC/UPC Connector Black Housing 50/125 OM3	066-028-10
	Multi mode SC/UPC Connector Black Housing 50/125 OM4	066-132-10

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Accessories Cont.

	Single mode LC/UPC Connector Blue Housing 9/125	066-029-10
	Single mode LC/APC Connector Green Housing 9/125	066-131-10
	Multi mode LC/UPC Connector Beige Housing 62.5/126 OM1	066-031-10
	Multi mode LC/UPC Connector Black Housing 50/125 OM2	066-030-10
	Multi mode LC/UPC Connector Aqua Housing 50/125 OM3	066-032-10
	Multi mode LC/UPC Connector Magenta Housing 50/125 OM4	066-130-10
	Single mode ST/UPC Connector Blue Housing 9/125	066-147-10
	Single mode ST/APC Connector Green Housing 9/125	066-184-10
	Multi mode ST/UPC Connector Beige Housing 62.5/125 OM1	066-148-10
	Multi mode ST/UPC Connector Beige Housing 50/125 OM2	066-149-10
	Multi mode ST/UPC Connector Black Housing 50/125 OM3	066-150-10
	Multi mode ST/UPC Connector Black Housing 50/125 OM4	066-151-10

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Accessories Cont.


Surelight Field Installable Connector Kits		
Products	Description	Stock ID
	900µm Connector Kit	072-395-10
	IP Connector Kit	072-395-50

Contact Us


North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 440 366 6966 Fax: +1 440 366 6802 Email: engsupport@gomultilink.com	Tel: +1 954 499 9203 Mobile: +1 305 684 2388 Email: hquinones@gomultilink.com

Dimensional Drawings

FT-4D

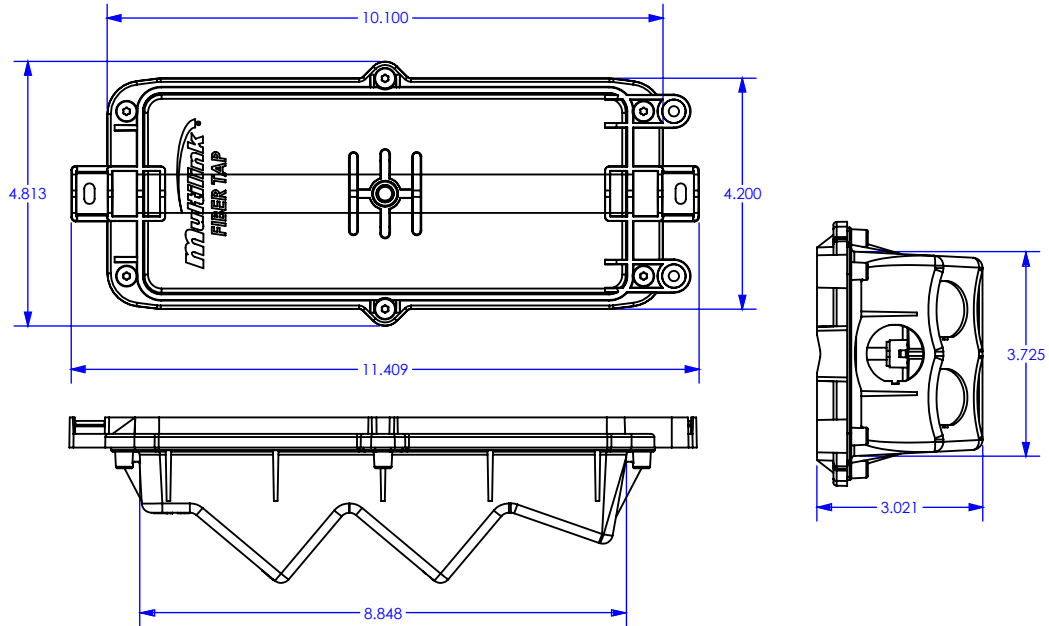

FT-8D

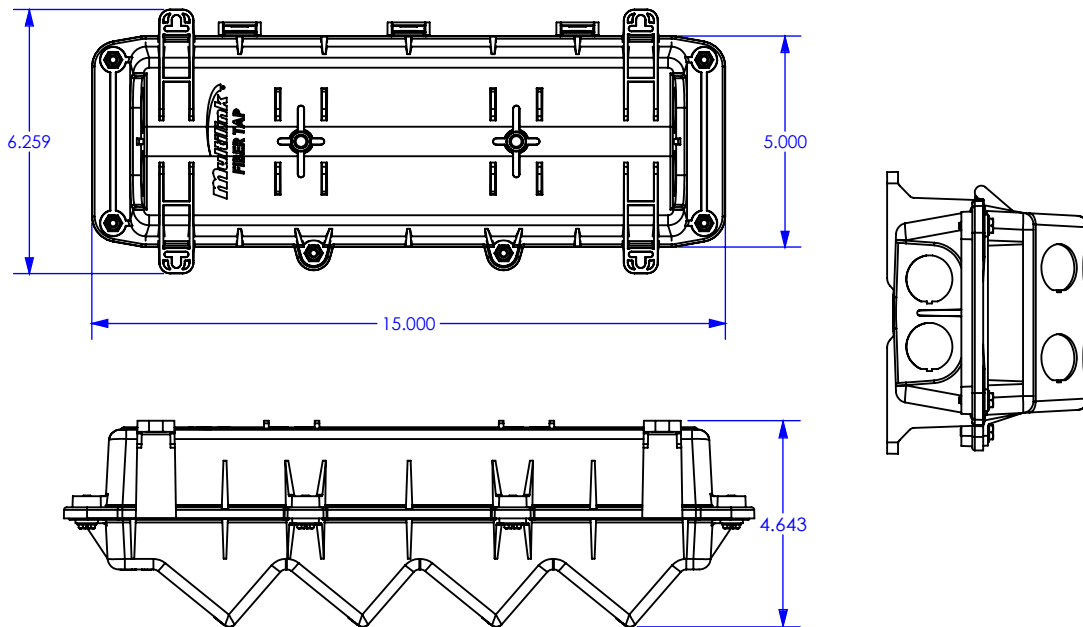


Contact Us


North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Dimensional Drawings

FT-8NC

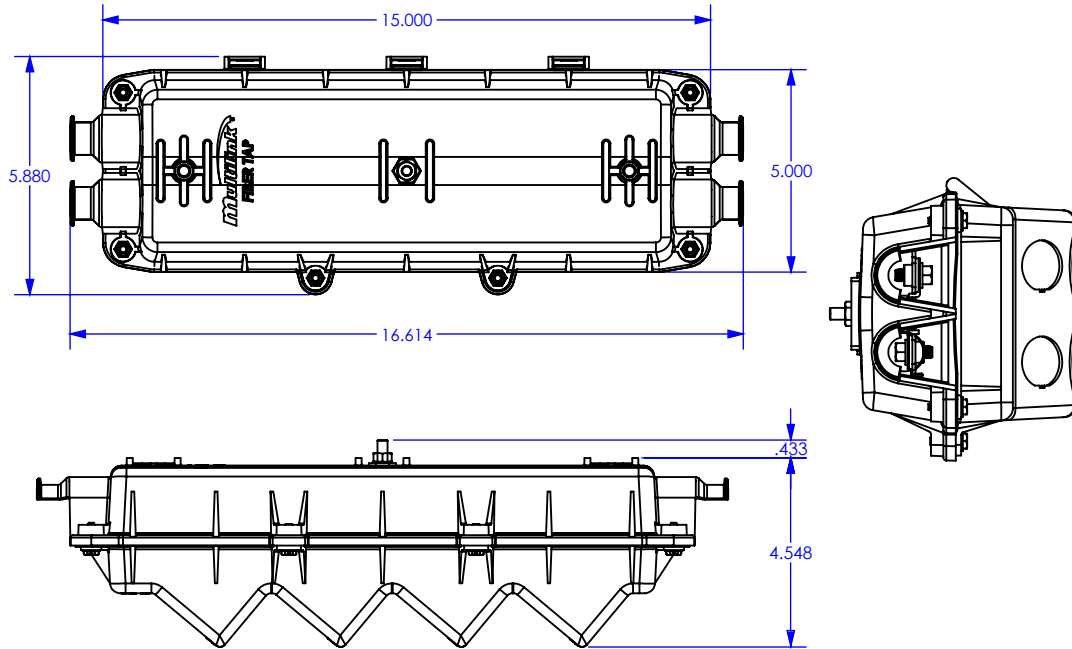


FT-2NC

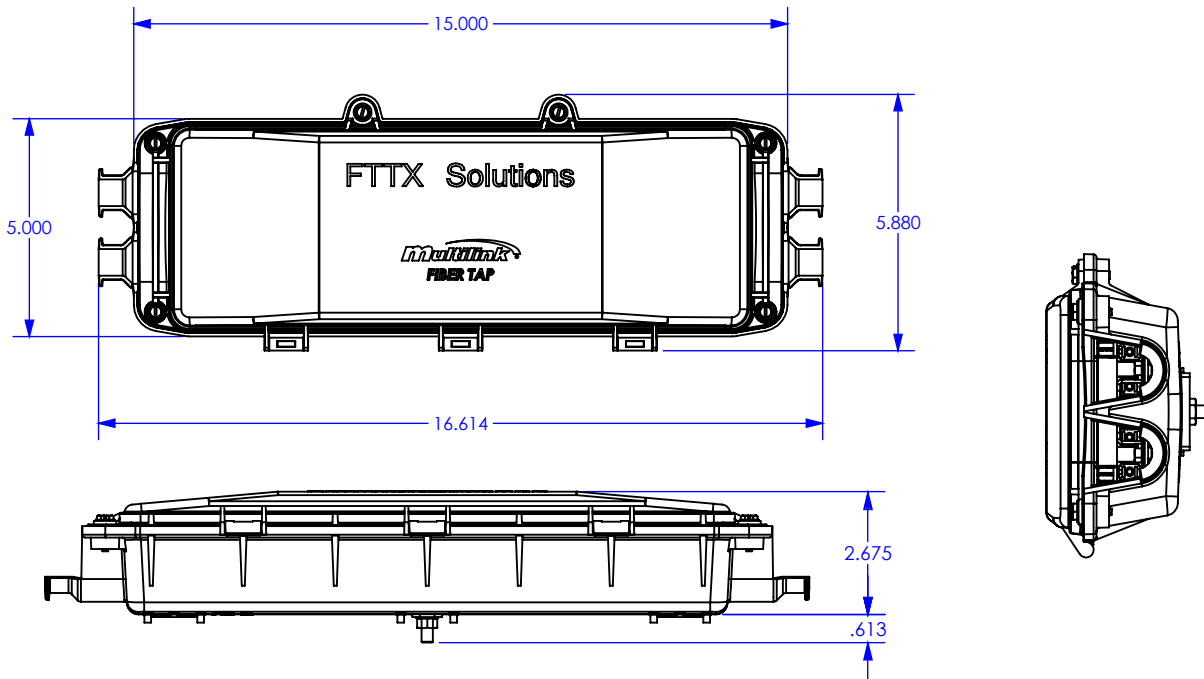

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

FTTX Applications

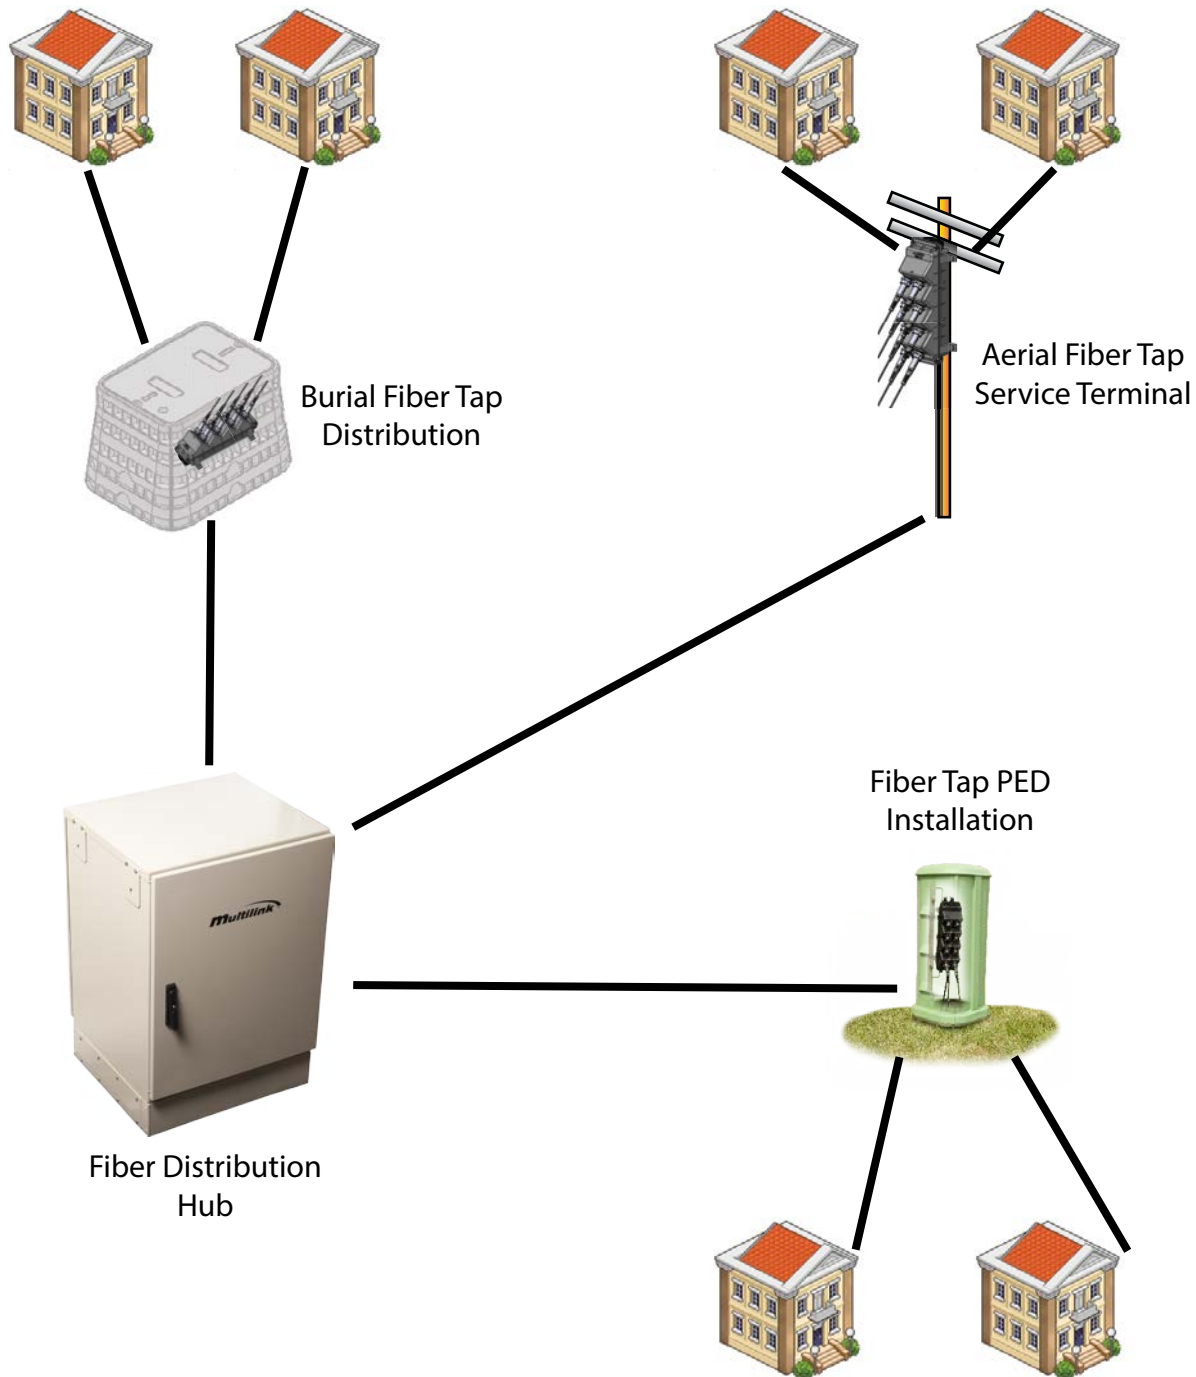

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Ordering Configurator



*THIS PRODUCT CAN NOT
BE SOLD IN THE USA

FT-4D

FT-4D	-	XX	-	XXX	-	XX	-	XX	-	XXXXF
Fiber Tap 4 Drop Series		Number of Drops		Splitter		Input Type		Output Type		Input Cable Length
		02 2		NNN None		FD Flat Drop (8.1mm x 4.5mm)		SA Surelight IP SC/APC Simplex		****F **** Feet
		04 4		104 1x4 PLC		RD Round		SU Surelight IP SC/UPC Simplex		****M **** Meter
		08 8*		108 1x8 PLC*				LA Surelight IP LC/APC Duplex		Example:
		*LC Only		*LC Only				LU Surelight IP LC/UPC Duplex		0050F 50 Feet

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Ordering Configurator



*THIS PRODUCT CAN NOT
BE SOLD IN THE USA

FT-8D

FT-8D	-	XX	-	XXX	-	XX	-	XX	-	XXXXF
Fiber Tap 8 Drop Series		Number of Drops		Splitter		Input Type		Output Type		Input Cable Length
		02 2		NNN None		FD Flat Drop (8.1mm x 4.5mm)		SA Surelight IP SC/APC Simplex		****F **** Feet
		04 4		104 1x4 PLC		RD Round		SU Surelight IP SC/UPC Simplex		****M **** Meter
		08 8		108 1x8 PLC				LA Surelight IP LC/APC Duplex		Example:
		16 16*		116 1x16 PLC*				LU Surelight IP LC/UPC Duplex		0050F 50 Feet
		*LC Only		*LC Only						

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com

Ordering Configurator Cont.



*THIS PRODUCT CAN NOT
BE SOLD IN THE USA

FT-8NC

FT-8NC	-	XX	-	XXX	-	XX	-	XX
Fiber Tap 8 Splice Series		Number of Drops		Splitter		Input Type		Output Type
	02	2	NNN	None	R1	Round 1 Grommet/ 3 Plugs	SA	Surelight IP SC/APC Simplex
	04	4	104	1x4 PLC	R2	Round 2 Grommets/ 2 Plugs	SU	Surelight IP SC/UPC Simplex
	08	8	108	1x8 PLC	R3	Round 3 Grommets/ 1 Plug	LA	Surelight IP LC/APC Duplex
	16	16*	116	1x16 PLC*	R4	Round 4 Grommets/ 0 Plugs	LU	Surelight IP LC/UPC Duplex
	*LC Only			*LC Only				

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com



Multilink Inc.
580 Ternes Ln
Elyria, OH 44035
Tel: (440) 366-6966
Fax: (440) 366-6802



facebook.com/GoMultilink



twitter.com/GoMultilink



youtube.com/GoMultilink

© Multilink Inc. 2015 All Rights Reserved

Contact Us

North America	Europe, Middle East & Africa	Latin & South America
Tel: +1 440 366 6966	Tel: +1 440 366 6966	Tel: +1 954 499 9203
Fax: +1 440 366 6802	Fax: +1 440 366 6802	Mobile: +1 305 684 2388
Email: engsupport@gomultilink.com	Email: engsupport@gomultilink.com	Email: hquinones@gomultilink.com